

# SAFESYSTEM EPDM GRANULES

Safety, vibrant colors  
and durability in one

Safesystem EPDM granules are the ideal solution for playgrounds, sports courts, and recreational areas. They are UV-resistant, durable, and slip-resistant – and available in a wide range of colors, allowing you to design inspiring and safe environments for both children and adults. Create safe, inspiring and functional outdoor spaces with Safesystem EPDM.

- ✓ Shock-absorbing and impact-friendly
- ✓ Long-lasting color and weather resistance
- ✓ Low maintenance and easy to clean
- ✓ Endless design possibilities with custom patterns





**Safer play**  
**Smarter surfaces**  
**Superior performance**

**SAFEFLOOR**



**STANDARD**

Virgin EPDM in 21 standard colours

**RED 01**  
RAL 3013**GREEN 02**  
RAL 6009**LIGHT GREEN 03**  
RAL 6017**BLUE 04**  
RAL 5017**LIGHT BLUE 05**  
RAL 5012**ORANGE 06**  
RAL 2005**YELLOW 07**  
RAL 1016**GOLDEN YELLOW 08**  
RAL 1033**BROWN 09**  
RAL 8011**LIGHT BROWN 10**  
RAL 1011**GREY 11**  
RAL 7015**LIGHT GREY 12**  
RAL 7001**EGGSHELL 13**  
RAL 1014**PINK 14**  
RAL 4010**PURPLE 15**  
RAL 4007**WHITE 16**  
RAL 9016**GRASS GREEN 17**  
RAL 6020

BINDER RECOMMENDATION		GRAIN SIZE	STOCK ITEM	ORDER ITEM **
UV Binder (Aliphatic)	Standard Binder (Aromatic)			
	■	1 - 3,5 mm	■	
	■	1 - 3,5 mm	■	
■	■	1 - 3,5 mm	■	
	■	1 - 3,5 mm		■
■	■	1 - 3,5 mm	■	
■	■	1 - 3,5 mm		■
■	■	1 - 3,5 mm		■
	■	1 - 3,5 mm	■	
	■	1 - 3,5 mm		■
■	■	1 - 3,5 mm		■
■	■	1 - 3,5 mm	■	
■		1 - 3,5 mm		■
■	■	1 - 3,5 mm		■
■		1 - 3,5 mm		■
	■	1 - 3,5 mm	■	

\* Please note that the product images are for guidance only. For the most accurate color representation, please refer to the RAL colour code.

\*\* Order items have an expected delivery time of 60-90 days.

**STANDARD**

Virgin EPDM in 21 standard colours


**NAVY BLUE 18**  
RAL 5002**ROSE RED 19**  
RAL 3027**BLUE GREY 20**  
RAL 5020**TURQUOISE 21**  
RAL 5018

BINDER RECOMMENDATION		GRAIN SIZE	STOCK ITEM	ORDER ITEM **
UV Binder (Aliphatic)	Standard Binder (Aromatic)			
	■	1 - 3,5 mm	■	
■	■	1 - 3,5 mm	■	
■	■	1 - 3,5 mm		■
■		1 - 3,5 mm		■

**RECYCLED**

Carefully selected recycled EPDM

Please note that color variations may occur


**GREY MIX**  
Recycled mix of grey nuances**BLACK**  
Recycled mix of black nuances**TENNIS & PADEL**  
Recycled tennis & padel balls, primarily a mix of black, beige, grey and yellow colors

■	■	1 - 3 mm	■	
	■	1 - 3 mm	■	
	■	1 - 3 mm	■	

**SAFESYSTEM BLEND**

Colorful mix of virgin and recycled EPDM

(1/3 recycled + 2/3 virgin EPDM)

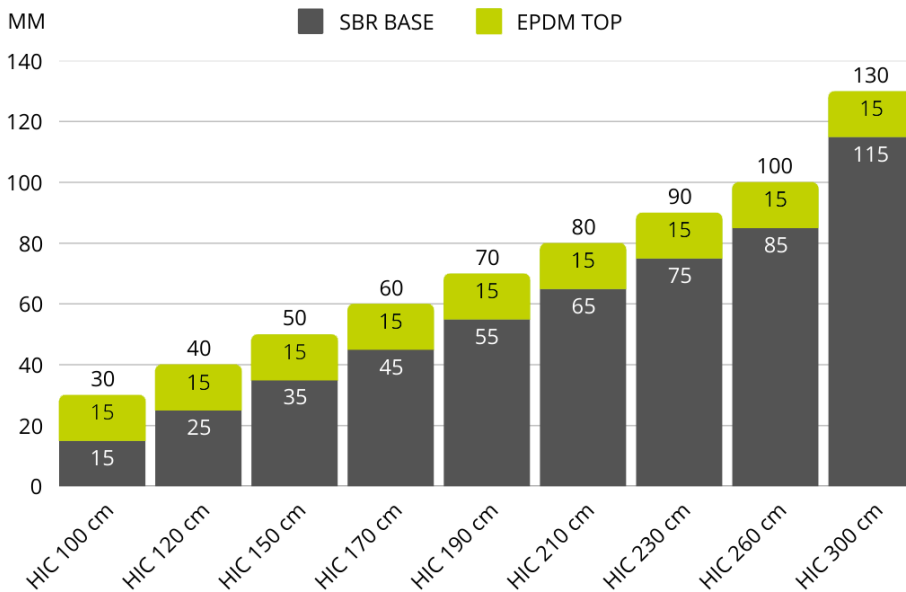
**SAFESYSTEM BLEND LIGHT GREEN**  
1/3 recycled Grey Mix  
+ 2/3 Light Green 03**SAFESYSTEM BLEND GOLDEN YELLOW**  
1/3 recycled Grey Mix  
+ 2/3 Golden Yellow 08**SAFESYSTEM BLEND LIGHT GREY**  
1/3 recycled Grey Mix  
+ 2/3 Light Grey 12**SAFESYSTEM BLEND NAVY BLUE**  
1/3 recycled Grey Mix  
+ 2/3 Navy Blue 18**SAFESYSTEM BLEND ROSE RED**  
1/3 recycled Grey Mix  
+ 2/3 Rose Red 19

■	■	1 - 3,5 mm	■	
	■	1 - 3,5 mm	■	
■	■	1 - 3,5 mm	■	
	■	1 - 3,5 mm	■	
■	■	1 - 3,5 mm	■	

\* Please note that the product images are for guidance only. For the most accurate color representation, please refer to the RAL colour code.

\*\* Order items have an expected delivery time of 60-90 days.

## Critical Fall Height (CFH)

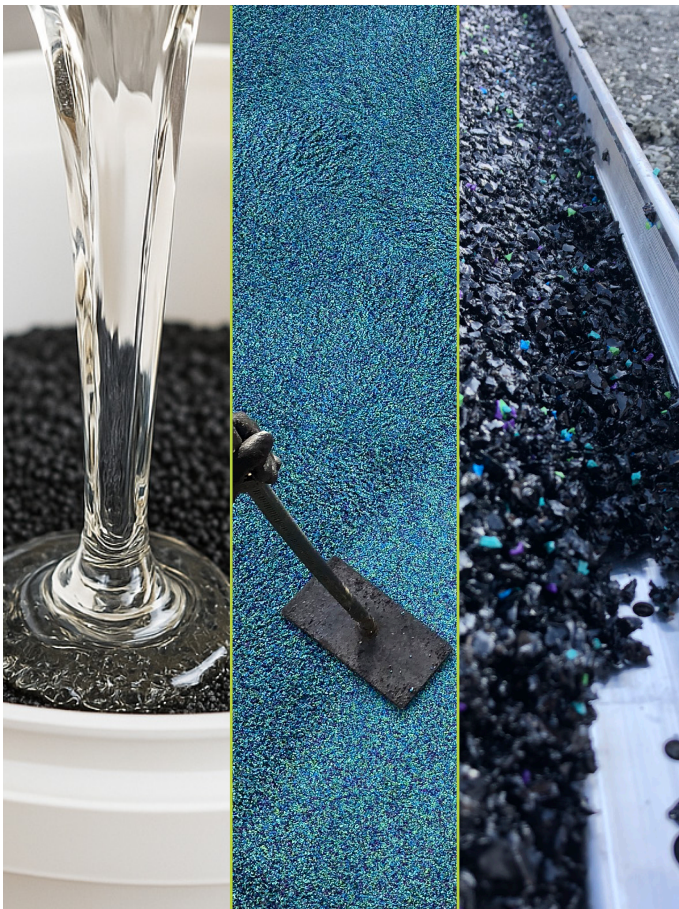


Safesystem EPDM surfaces are ideal for areas where fall protection is required, such as playgrounds and sport facilities.

If installed on a loose surface, we recommend installing a minimum of 40 mm (25/15).

Installations on hard surfaces such as concrete and asphalt can be done with a 20 mm pure EPDM top layer, if no fall height is required.

We recommend applying a primer to the area, prior to installing the EPDM.



## Binders, primers & tools

**- everything you need to work effectively and to make high-quality, long-lasting installations**

We offer a range of quality binders and primers, as well as the tools needed, to ensure a smooth and efficient installation and a professional result.

Whether you are installing during hot summer days, or on the colder days at the beginning or end of the season, we provide premium products that will help you get good results even in difficult conditions.

Reach out to us for guidance, product recommendations or more information – we are here to help!

Safefloor ApS  
Bjødstrupvej 10  
DK - 8410 Rønde

Email: [info@safefloor.dk](mailto:info@safefloor.dk)  
Phone: +45 8615 1925

DK website: [www.safefloor.dk](http://www.safefloor.dk)  
SE website: [www.safefloor.se](http://www.safefloor.se)

**SAFEFLOOR**